



Canmaker



All the benefits of the CMbE Bodymaker and Trimmer, seamlessly combined into one convenient and reliable package



Housed in one enclosure for convenience, ease of maintenance and safety



Specially designed conveyor between Bodymaker and Trimmer for quick changeovers



Dual stroke facility offers enhanced flexibility for handling different can sizes



Precise and accurate Trimming



High-speed Bodymaking and Trimming from one fully integrated machine



Machines can be tailored to bespoke Cup requirements

Contact our team to find out more about the CMbE Canmaker

Call Us
Email Us
Online


+44(0)1274 846200
sales@cmbe.com
www.cmbe.com



Technical Data

Stroke:	22"	24.5"	26"	30"
Max. untrimmed can height:	159mm	*189mm	200mm	*244mm
Max. can diameter:	52-73mm (202-300)	52-84mm (202-307)	52-73mm (202-300)	52-73mm (202-300)
Main Motor:	Bodymaker = 55kW (74hp) Trimmer = 2.2kW (3hp)			
Air:	<u>Supply</u> 6.2 bar (90psi) min		<u>Consumption</u> 3.3m ³ /min (115cfm) at 6.2 bar (90psi)	
Vacuum:	Trimmer 0.6 bar (22" at HG)		135m ³ /h (80cfm)	
	Conveyor 24m bar (10" at WG)		31m ³ /min (1100cfm)	
Typical Weight: (Dry)	Canmaker: Control cabinet: Hydraulic powerpack:		13,400Kg (29,500lbs) 526Kg (1160lbs) 960Kg (2120lbs)	
Guards:	Complete safety guarding, electronically interlocked to the control system. Fully conforms to the requirements of the European Machinery Safety Directive			

**Dependent upon Cup geometry*

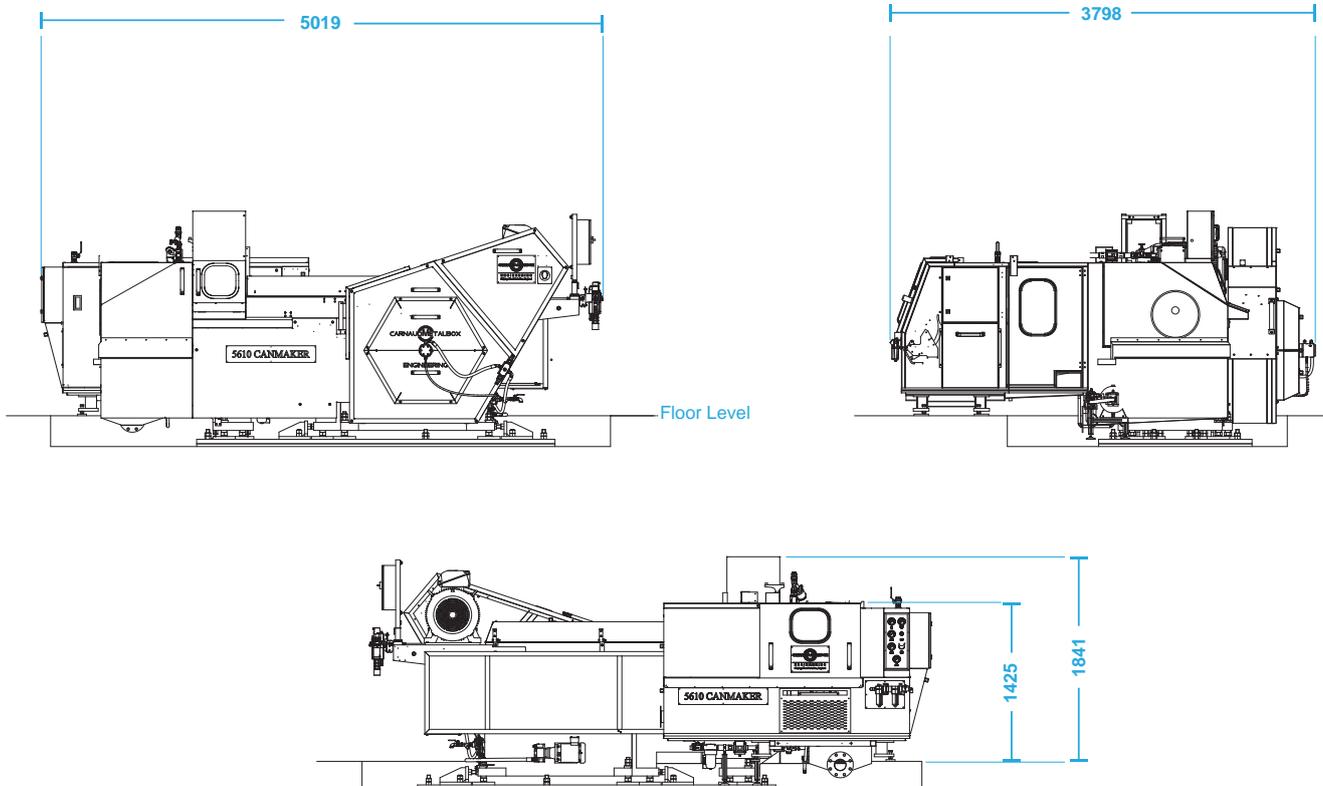

Contact our team to find out more about the CMbE Canmaker

Call Us +44(0)1274 846200
 Email Us sales@cmbe.com
 Online www.cmbe.com

